

Subject: Secured Entry
 Cleaveland Elementary School

Owner: Unified School District #259
 Wichita, Kansas

ITEM #1: Attendance of the specified Prime Contractor at the pre-bid conference at 1:30 p.m. on October 13, 2020 was mandatory in order to bid this project. The following attended the pre-bid meeting:

- Van Asdale Construction
- Cherokee Construction
- Compton Construction
- Bauer & Son Construction
- Specialty Contractors
- Snodgrass and Sons
- Harman Huffman

ITEM #2: REPLACE:
 Drawings should indicate that the gutter is to tie into the current storm drain system. The current system should be cleaned to daylight. Page: A1 Revision 1, 10-09-2020; was replaced with: A1 Revision 2, 10-15-2020. See Drawings for Revisions.

ITEM #3: REPLACE:
 Door hardware schedule in the spec- Section 08.71.00

**SECTION 087100
 DOOR HARDWARE**

1.01 TYPICAL DOOR HARDWARE

Aluminum (Single) Entry (for use on non-electricified entrance):

Door(s): [D02]				
1	Continuous Hinge	MK	MCK-12HD or MCK-14HD (as required) CL	
1	Exit Device	Sargent	8804 PSB US32D w/Best Cylinder	VK98NLx990NL
				PR 2103 x1700A
1	Cylinder	BE	1E-72 626	

1	Door Closers	Corbin	CD8210-A11 M54 M85 M77 689	
1	HD Threshold	Pemko	2005AT x Opening Width	
1	Sweep	PE	345AV x Door Width	

Aluminum (Single) Entry (for use on electrified entrance):

Door(s): [D01]

1	Continuous Hinge	MK	MCK-12HD or MCK-14HD (as required) CL	
1	Electric Jamb Transfer			
1	Exit Device	Sargent	8804 PSB US32D w/Best Cylinder	VK98NLx990NL
				PR 2103 x1700A
1	Cylinder	BE	1E-72 626	
1	Door Closers	Corbin	CD8210-A11 M54 M85 M77 689	
1	HD Threshold	Pemko	2005AT x Opening Width	
1	Sweep	PE	345AV x Door Width	

Office Secured:

Doors: [D03]

3	Hinges	McKinney	TA2714 4-1/2" x 4-1/2" US26D	or equal
1	Office Lockset	Corbin	M1201XLWM 626	NO-SUB
1	Cylinder			
1	Electric Strike	HES	1006CS	NO-SUB
1	Door Closer	Corbin	DC6210-A3 689	NO-SUB
1	Wall Stop	McKinney	WS02 US32D	RCK 409
3	Door Silencers	McKinney	S1M	RCK 908

Office:

Doors: [D04]

3	Hinges	McKinney	TA2714 4-1/2" x 4-1/2" US26D	or equal
1	Office Lockset	Corbin	M1201XLWM 626	NO-SUB
1	Cylinder			
1	Door Closer	Corbin	DC6210-A3 689	NO-SUB


1	Wall Stop	McKinney	WS02 US32D	RCK 409
3	Door Silencers	McKinney	S1M	RCK 908

END OF SECTION

ITEM #4: CLARIFICATION:

Section 001120 – Invitation to Bid:

Find project in E-bid system. Click on the activities tab under project, then click on the “Questions Due Date”. Screen will pop-up that looks as follows:

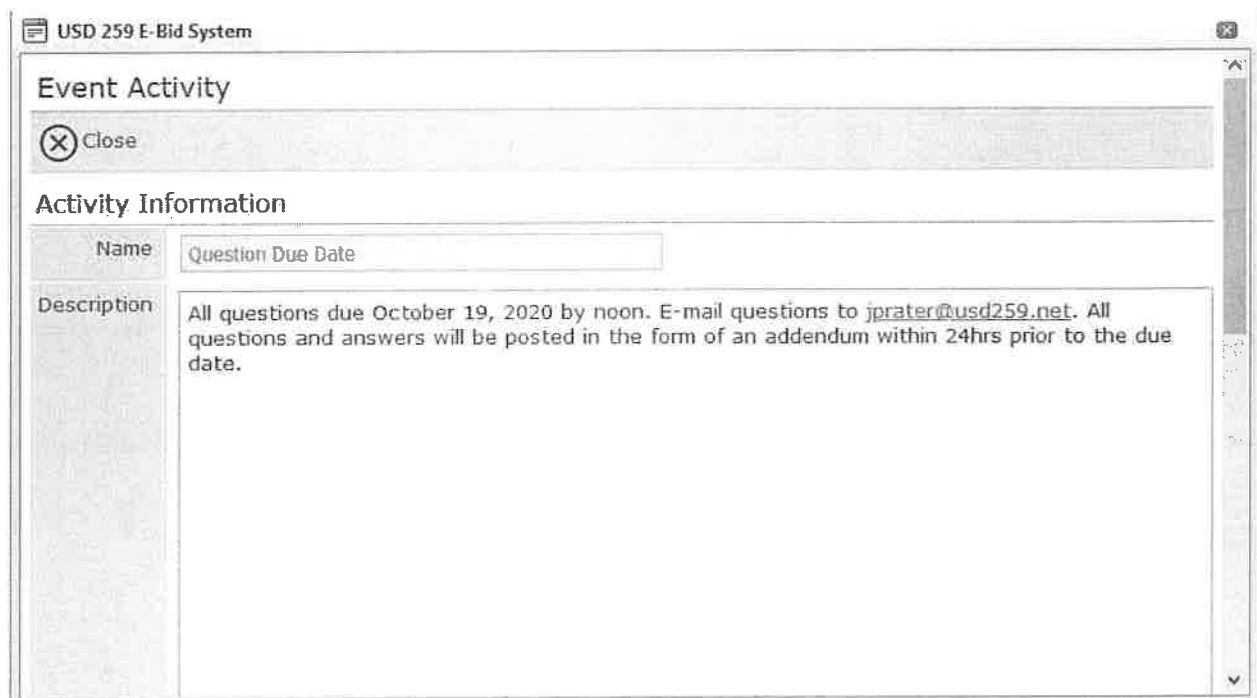

ITEM #5: CLARIFICATION:

All contractors, subcontractors, and contracted engineers will be required to carry appropriate liability insurance, per the General Conditions and USD 259 requirements, for their respective role in the project, and scope of work.

Addendum #2
October 14, 2020

Job # 2104
Bid #21-42-0004

ITEM #6: CONFIRMATION:

All ceiling, paint, VCT, and walls do not need a finish schedule. They are covered in A1 Keyed Architectural Plan Notes. The design intent is to match existing finishes within project area.

ITEM #7: REPLACE:

Elevation call-outs have been corrected in the Architectural Floor Plan A1. A1 Revision 1, 10-09-2020; was replaced with: A1 Revision 2, 10-15-2020. See Drawings for Revisions.

ITEM #8: ADDITION:

Electrical and Data have been located for the reception and work stations in office. A1 Revision 1, 10-09-2020; was replaced with: A1 Revision 2, 10-15-2020. See Drawings for Revisions.

ITEM #9: CONFIRMATION:


Labor for USD 259 is not taxable.

ITEM #10: CLARIFICATION:

Detail 20/A2:

The design intent is to use a wood panel to match the doors; NOT a transom frame with a lite kit.

This addendum shall be acknowledged by the bidder on the Bid Form.

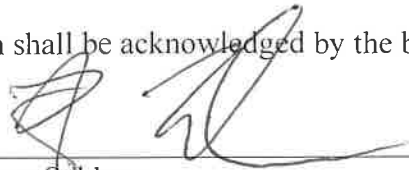

Kenny Saldana
Design & Construction
USD 259